

The Gripple Dynamic Range of fasteners and tensioners is ideal for high load anchoring and structural bracing.

## FEATURES / BENEFITS


- High load performance for safety and security
- Join and tension in one
- Integral lock; one action locks the wire in both channels simultaneously
- High grade ceramic roller for corrosion resistance
- Available in ready to use kits (DPAK) for a fast and secure bracing solution



## SPECIFICATION

Type	Wire Diameter	Maximum Working Load
Dynamic 4	4.00 mm	750 kg
	4.75 mm	1,000 kg
Dynamic 6	6.00 mm	1,750 kg

## INSTALLATION

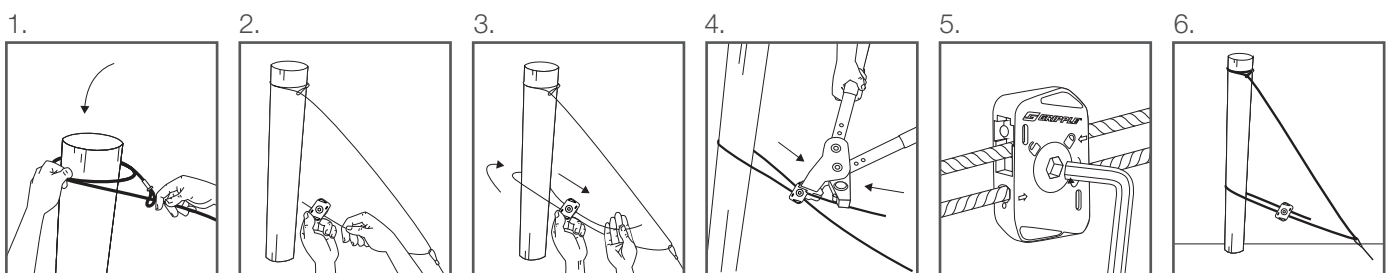

## TIPS

- Tension using a tensioning tool
- Use hex key supplied to lock both channels simultaneously
- Unlock and re-tension without releasing the load



PI-DYNAMIC-T-ENG

[www.gripple.com](http://www.gripple.com)

Gripple's policy is one of continuous development and innovation. We therefore reserve the right to alter specifications, etc. without notice.

Gripple Ltd | The Old West Gun Works | Savile Street East | Sheffield S4 7UQ  
Tel 0800 018 4264 Fax 0114 275 1155 email [info@gripple.com](mailto:info@gripple.com)